



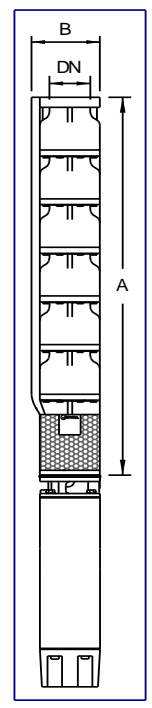

**10 300**

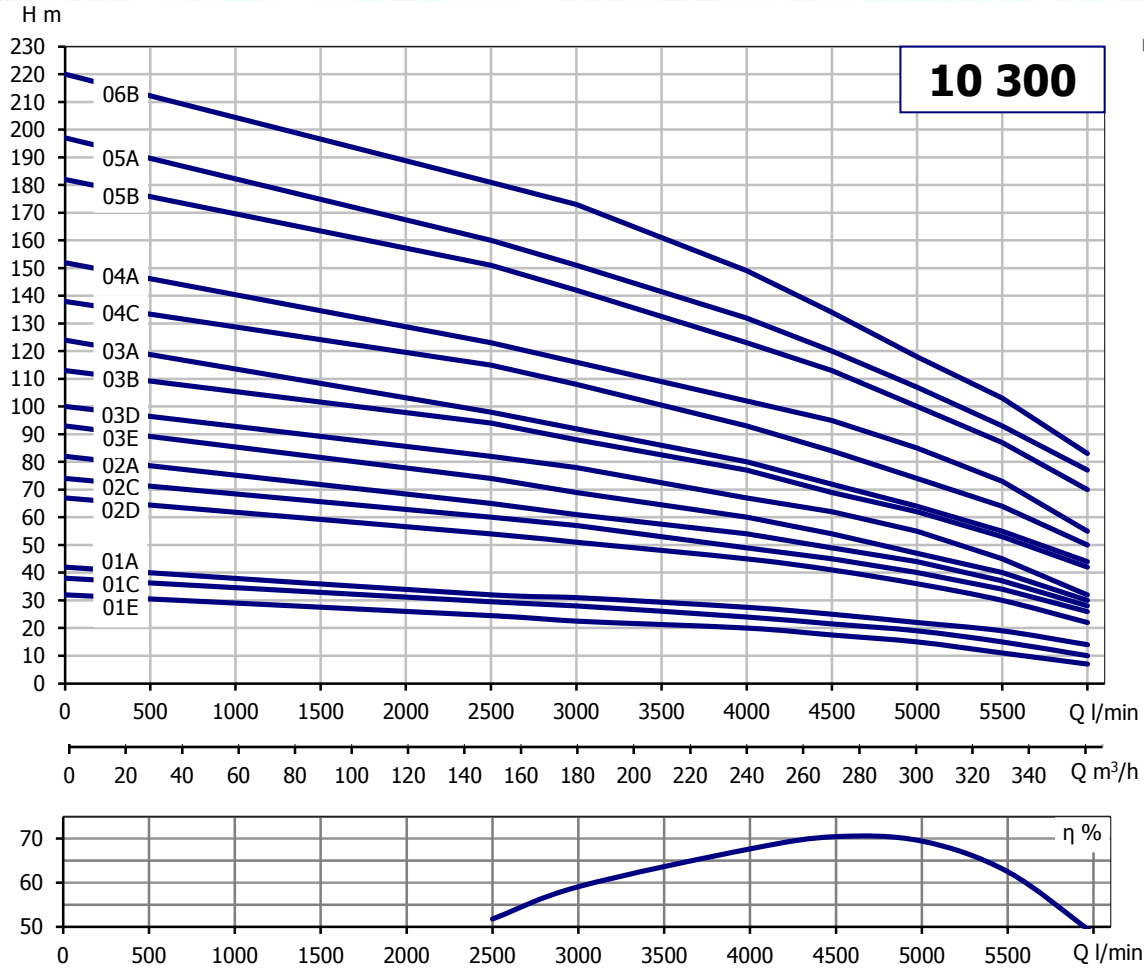

Model	Motor		Q - Flow									Afmetingen en gewichten				
			m³/h	0	150	180	240	270	300	330	360	Motor	A	B	DN	kg
	l/min	0	2500	3000	4000	4500	5000	5500	6000		mm	mm				
10300 01E	22	30		32	25	23	20	18	15	11	7	6"	770	250	G 6"	71
10300 01C	26,5	35		38	30	28	24	22	19	15	10	6"	770	250	G 6"	71
10300 01A	30	40		42	32	31	28	25	22	19	14	6" / 8"	770	250	G 6"	71
10300 02D	45	60		67	54	51	45	41	36	30	22	6" / 8"	950	250	G 6"	94
10300 02C	50	70		74	60	57	49	45	40	34	26	8"	950	250	G 6"	94
10300 02A	55	75		82	65	61	54	49	44	37	28	8"	950	250	G 6"	94
10300 03E	60	80		93	74	69	60	54	47	40	30	8"	1130	250	G 6"	117
10300 03D	66	90		100	82	78	67	62	55	45	32	8"	1130	250	G 6"	117
10300 03B	75	100		113	94	88	77	69	62	53	42	8"	1130	250	G 6"	117
10300 03A	81	110		124	98	92	80	72	64	55	44	8"/10"	1130	250	G 6"	117
10300 04C	93	125		138	115	108	93	84	74	64	50	8"/10"	1275	250	G 6"	129
10300 04A	110	150		152	123	116	102	95	85	73	55	10"	1275	250	G 6"	129
10300 05B	130	175		182	151	142	123	113	100	87	70	10"	1420	250	G 6"	141
10300 05A	130	175		197	160	151	132	120	107	93	77	10"	1420	250	G 6"	141
10300 06B	150	200		220	181	173	149	134	118	103	83	10"	1565	250	G 6"	153

Karakteristiek bij 2850 rpm