

PRORIL

50 Hz



Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL residue pumps can pump down to a low water level at 1/16" (2mm), which is ideal for pumping flat surface such as basements, parking garages, pools, spas and etc.

Handy and Residue Pump


SAVVY BASE 300

Residue Pump



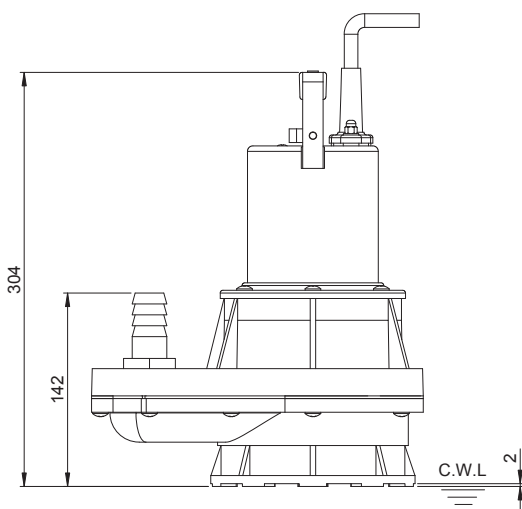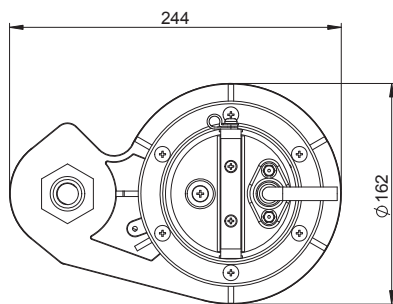

Weight : 4kg / 8.8 lbs

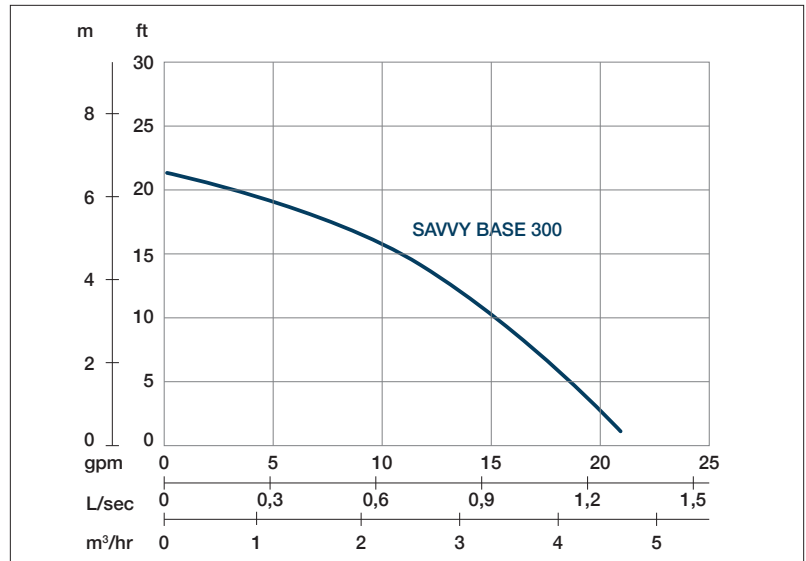

Shaft Speed : 2850 rpm Solid Passage : 2 mm Outlet : 25mm, 1in

OUTPUT	HEAD	FLOW
0.25 kW	Rated : 4m, 13ft	Rated : 0.9 l/s, 15 gpm
0.33 HP	Max : 6.5m, 21ft	Max : 1.3 l/s, 21 gpm

Pump Type		Electric Submersible Pumps
		1-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Miniature Thermal Protector
	Starter	Capacitor-Run
Lubricant		Food Grade (ISO VG115)
Impeller Type		Vortex
Shaft Seal		Single Mechanical Seal Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		H07RNF Length: 10m (33ft) or longer upon request.
Materials	Pump Casing	Plastic
	Impeller	Techno-polymer
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Bottom Plate	Plastic
Max. Liquid Temperature		104°F (40°C)
Max. Submersion Depth		66ft (20m)
pH Range		pH 5 - pH 8